

IPC Panel PC



Features



- Intel® 3rd Gen. Core™ i5/i3/Pentium® processor
- Equipped with Intel® Q77 chipset
- Memory support two DDR3 DIMM sockets 1333/1600 up to 16 GB
- 2 x GbE LANs
- 4 x USB 3.0
- RAID 0/1
- Front panel IP65 design
- Stainless steel front bezel
- 2 x PCI slots for riser card (optional)

Specifications



System

CPU Type	Intel® 3rd Gen. Core™ i5/i3/Pentium® processor
Chipset	Intel® PCH Q77
Memory Support	2 x 240 pins DDR3 DIMM up to 16 GB
Front Bezel	Stainless steel (SUS 304)
IP65	Yes (for front panel only)
Watchdog	1~255 seconds watchdog timer selectable
Power Supply	ATX 220W power supply
Operating System	Windows XP / Windows 7 / Windows 8 / Windows 8.1 / Ubuntu 14.04
Dimensions	497 x 420 x 93.4 mm (W x H x D)
System Weight	10.6 Kg
Mounting Support	75 mm / 100 mm VESA bracket (optional)
Certifications	FCC / CE

I/O Ports

Display	1 x VGA
USB	4 x USB 3.0
Audio	1 x Line-in / Line-out / MIC
LAN	2 x GbE LANs, Wake-On-LAN LAN 1: Intel® 82579V (82579LM) LAN 2: Intel® 82583V
Serial Ports	4 x COM ports COM 1/3/4 for RS-232, COM 2 for RS-232/422/485, (COM 3/4 support +5V/+12V selectable)
Parallel Port	1 x parallel port (SPP/EPP/ECP)
Digital I/O	4 in / 4 out
Keyboard / Mouse	2 x PS/2 ports
Drive Bay	2 x 2.5" SATAIII HDDs, 1 x slim DVD-ROM (optional)
Expansion Slots	1 x mini PCIe slot (on board) 2 x PCI slots (optional)

Display

LCD	19" LED backlight 300 nit LCD, resolution 1280 x 1024
Touch Screen	(ELO) 5W analog resistive (USB interface)

Applications


- Retail / Chain Store
- Food Service
- Information

Environment


Operating Temp.	HDD: 0°C~50°C (32°F~122°F) Ambient with air flow
Storage Temp.	-20°C~80°C (-4°F~176°F)
Humidity	20%~90%

IPC Panel PC

Highlights

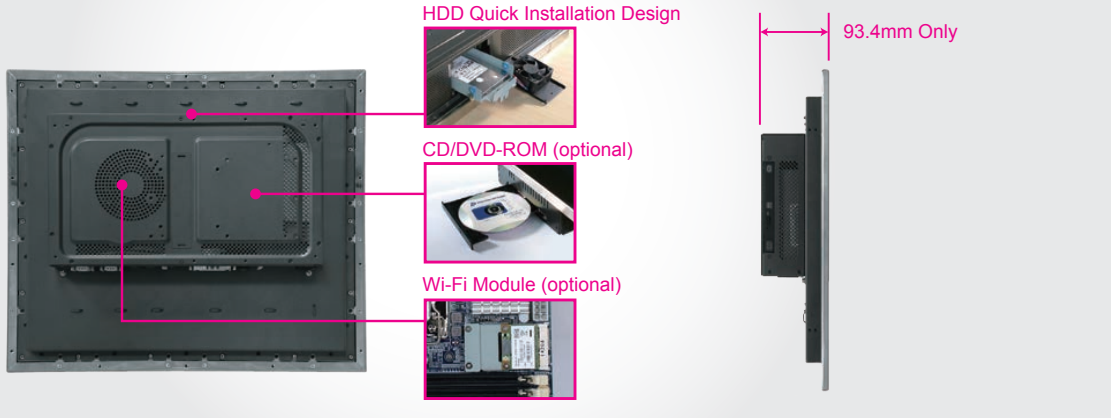

I/O Panel View

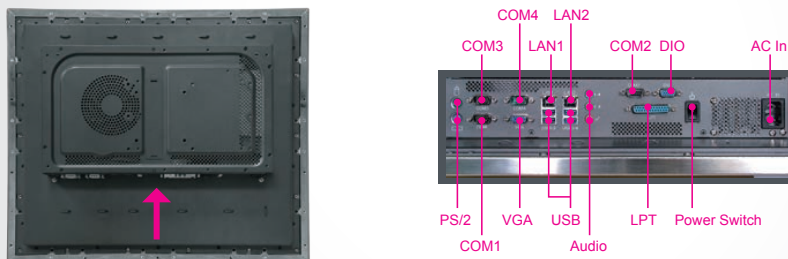

Dimensions

